

ASSISTANT COMMISSIONER FOR PATENTS

Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of:

Inventor: Malcolm J. McArthur et al.For: TURBOJET ENGINE LUBRICATION SYSTEM

Transmitted are:

2 sheets of drawing.

An assignment of the invention to \_\_\_\_\_ application.

A certified copy of a \_\_\_\_\_

A Declaration and Power of Attorney.

A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	13 - 20 =	* 0
INDEP. CLAIMS	3 - 3 =	* 0
MULTIPLE DEPENDENT CLAIM PRESENTED		

\* If the difference in Col. 1 is less than zero, enter 0 in Col. 2.

SMALL ENTITY	
RATE	FEE
	\$ 380
x 9 =	
x 39 =	
+ 130 =	
TOTAL	

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$ 760
x 18 =	0
x 78 =	0
+ 260 =	-----
TOTAL	\$760

OR

OR

OR

OR

OR

☐ Please charge my Deposit Account No. \_\_\_\_\_ the amount of \$ \_\_\_\_\_. A duplicate copy of this sheet is enclosed.

☒ A check in the amount of \$ \_\_\_\_\_ to cover the filing fee is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 23-0785. A duplicate copy of this sheet is enclosed.

☒ Any additional filing fees required under 37 CFR 1.16.

☒ Any patent application processing fees under 37 CFR 1.17.

☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 23-0785. A duplicate copy of this sheet is enclosed.

☒ Any patent application processing fees under 37 CFR 1.17.

☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

## CERTIFICATE OF MAILING BY "EXPRESS MAIL"

"Express Mail" mailing label number EM114094270US  
Date of Deposit July 9, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Corinne Byk

(Typed or printed name of person mailing paper or fee)

*Corinne Byk*  
(Signature of person mailing paper or fee)

Respectfully submitted,

*Wm. A. VanSanten*

Wm. A. VanSanten  
Reg. No. 22,810



A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: ) TURBOJET ENGINE  
Malcolm J. McArthur et al. ) LUBRICATION SYSTEM  
Serial No. (unassigned) ) Examiner: Unassigned  
Filed (herewith) ) Group Art Unit: Unassigned

TRANSMITTAL LETTER

BOX - PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:


Enclosed herewith for filing under 37 C.F.R. Section 1.53(b) is a patent application, including:

- 1) A specification, claims and abstract for the patent application of Malcolm McArthur and Anthony C. Jones, entitled TURBOJET ENGINE LUBRICATION SYSTEM;
- 2) Two sheets of informal drawings;
- 3) A check in the amount of \$760.00 to cover the filing fee;
- 4) Computation sheet form PTO-1082 (in duplicate);

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

"Express Mail" mailing label number EM114094270US  
Date of Deposit: July 9, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

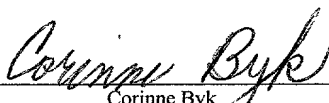  
Corinne Byk

- 5) Declaration and Power of Attorney for Malcolm J. McArthur and Anthony C. Jones (signed);
- 6) Certificate of Mailing by "Express Mail" No. EM114094270US.


Any additional costs incurred with regard to this matter should be charged to our Deposit Account No. 23-0785.

The filing date based on the filing of these papers under 37 CFR Section 1.10(a) is respectfully requested.

Respectfully submitted,

WOOD, PHILLIPS, VAN SANTEN,  
CLARK & MORTIMER

By

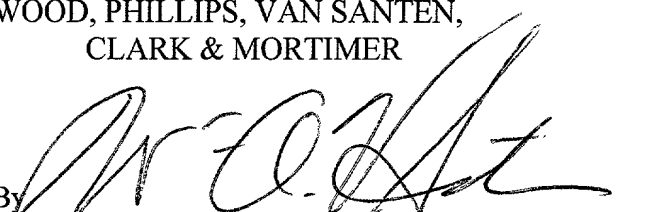

Wm. A. VanSanten  
Reg. No. 22,810

Date: July 9, 1999

500 West Madison Street  
Suite 3800  
Chicago, IL 60661  
(312) 876-1800

**APPLICATION FOR  
UNITED STATES LETTERS PATENT  
SPECIFICATION**

---

CERTIFICATE OF MAILING BY "EXPRESS MAIL" - "Express Mail" mailing label number EM114094270US

Date of Deposit: July 9, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

*Corinne Byk*  
(Corinne Byk)

TO ALL WHOM IT MAY CONCERN:

Be it known that Malcolm J. McArthur,  
a citizen of the United States residing at 2340 Mardavido Lane, Fallbrook  
in the County of San Diego and State of California  
and Anthony C. Jones,  
a citizen of the United States, residing at 10867 Pesos Place, San Diego  
in the County of San Diego and State of California  
and \_\_\_\_\_,  
a citizen of the United States, residing at \_\_\_\_\_  
in the County of \_\_\_\_\_ and State of \_\_\_\_\_,  
and \_\_\_\_\_,  
a citizen of the United States, residing at \_\_\_\_\_  
in the County of \_\_\_\_\_ and State of \_\_\_\_\_,  
have invented a new and useful TURBOJET ENGINE LUBRICATION SYSTEM

of which the following is a specification.

## TURBOJET ENGINE LUBRICATION SYSTEM

### FIELD OF THE INVENTION

This invention relates to lubrication systems for gas turbine engines, and even more particularly, to lubrication systems for expendable turbojet engines.

### BACKGROUND OF THE INVENTION

Gas turbine engines conventionally include a rotary compressor, a turbine, and a rotary shaft interconnecting the two. As is typical in equipment of all sorts having rotatable components, except when exotic bearings, such as magnetic bearings, are employed, it is necessary to provide for lubrication of the rotary components. In typical gas turbine engines, lubricating oil is provided to bearings journalling the rotary components, recovered and then recycled. These systems require pumps for recovering the lubricating oil as well as for circulating the lubricating oil. While such systems perform quite adequately, they can be heavy and/or bulky, not to mention expensive in construction. As a consequence, they are not suitable for use in all gas turbine systems.

For example, cruise missiles and target drones used by the military are frequently powered by small turbojet engines. Because these airborne vehicles are intended to be used, in the case of a cruise missile, but a single time, and in the case of target drones, no more than a couple of times, the turbojet engines employed are designed to be inexpensive to thereby provide an expendable engine. It accordingly follows that it is

desirable that engine supporting systems, including the lubrication system, likewise be inexpensive as well. And because such engines are frequently used in airborne vehicles, it is highly desirable to minimize weight so that payload and/or range may be maximized.

At the same time, the lubrication system must be capable of operating reliably for the life of the engine and over a wide range of temperatures, typically from minus 40°F to plus 180°F. Because these engines typically operate at a high rpm, a shaft or gear driven pump system is impractical as well as expensive.

Typically, the engines employed are relatively small and consequently, the lubricant flow rate is similarly small. Nonetheless, the flow must be reliable and delivered within the desired range under any and all conditions of operation. Typically, oil flows in the range of 1.5cc per minute to 2.5cc per minute are employed. To reliably obtain such flows when the oil experiences substantial changes in viscosity, dependent upon ambient temperature, poses substantial difficulty. Too little oil flow results in bearing failure and too great of an oil flow can result in premature exhaustion of oil and bearing failure.

Specifically, the nature of the system is that the maximum rate for the total oil flow has to be limited to assure that lubricating oil is available at or near the end of the mission cycle. Furthermore, the maximum rate has to be limited so as to enable the minimization of the size of the oil tank. Moreover, the system additionally has to be capable of being stored in the state of non-use with its compliment of lubricating oil for up to 15 years without loss and at the same time be ready for use immediately upon demand.

The present invention is directed to providing a lubricating oil system meeting these and other needs.

## SUMMARY OF THE INVENTION

It is the principal object of the invention to provide a new and improved lubricating system for a gas turbine engine. More specifically, it is an object of the invention to provide a new and improved lubricating system for a turbojet engine; and even more specifically, it is an object of the invention to provide a new and improved lubricating system for an expendable turbojet engine mounted on an airborne vehicle.

An exemplary embodiment of the invention includes a lubrication system for an expendable, gas turbine engine which includes a gas turbine engine having a rotatable shaft. Bearings journal the shaft for rotation about an axis. A vessel containing lubricating oil is provided and a conduit extends from the vessel to the bearings. A solenoid operated valve is located in the conduit and is operable only to either fully open or fully close. A control circuit is provided for pulsing the solenoid at a controlled rate to alternately (a) allow oil flow; and (b) halt oil flow to the bearings for a time insufficient to cause oil starvation of the bearings.

In one embodiment of the invention, the vessel includes a tank and a bladder is disposed within the tank. Also provided is a source of gas under pressure. One or the other of the tank and the bladder contain lubricating oil for the bearings and the other of the tank and the bladder is connectable to the source of gas under pressure. By

pressurizing the other of the tank and the bladder, lubricating oil is expelled into the conduit whenever the solenoid valve opens.

In one embodiment, the tank contains the lubricating oil and the gas under pressure is admitted to the bladder. In another embodiment, the bladder contains the lubricating oil and the tank receives the gas under pressure.

In a highly preferred embodiment, the time over which the valve is closed is no more than about 3 seconds.

A preferred embodiment includes a metering orifice in the conduit between the bearings and the solenoid valve.

A highly preferred embodiment further includes a pressure regulator operatively interposed between the one of the tank and the bladder receiving gas under pressure.

According to the embodiment mentioned immediately preceding, the pressure regulator receives an input representative of the pressure at the bearings.

In a highly preferred embodiment, the engine is mounted in a vehicle and the control circuit receives inputs indicative of vehicle velocity and temperature of the lubricating oil.

Even more preferably, the vehicle is an airborne vehicle and the control circuit additionally receives an input representative of the altitude of the vehicle.

Preferably, the tank is in sufficiently close proximity to the engine so as to receive heat rejected by the engine so that the lubricating oil is warmed by engine operation to reduce its viscosity.



The invention also contemplates that the source of gas under pressure may be pressurized gas stored in a pressure vessel or air under pressure from the compressor section of the turbine engine.

Other objects and advantages will become apparent from the following specification  
5 taken in connection with the accompanying drawings.

#### DESCRIPTION THE DRAWINGS

Fig. 1 is a somewhat schematic sectional view of an airborne vehicle powered by a turbojet engine and embodying a lubrication system made according to the invention;

Fig. 2 is a somewhat simplified schematic of part of the lubrication system;

Fig. 3 illustrates a form of a vessel for storing lubricating oil that may be used as an alternative to that shown in Fig. 2;

Fig. 4 shows a pressurization system for use with the oil storage vessels shown in either Fig. 2 or Fig. 3;

Fig. 5 is a partial schematic illustrating an alternative for the embodiment illustrated  
15 in Fig. 4; and

Fig. 6 is a flow diagram illustrating the use of various control parameters.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

An exemplary embodiment of the invention is illustrated in the environment of a turbojet driven airborne vehicle of the expendable type, such as a cruise missile or a target

drone. The vehicle includes a vehicle body, generally designated 10, which may or may not be provided with wings 12 of conventional construction. At the rear of the body 10 is a jet nozzle 14 by which the body 10 is propelled as a result of hot gases of combustion exiting the nozzle 14.

5 In the forward part of the body 10, a payload 16 is located. In the case of a cruise missile, the payload would be munitions whereas in the case of a target drone, the payload 16 might include a parachute or the like to allow recovery and possible re-use of the target drone.

At the rear of the body 10, a small expendable turbojet engine, generally designated 20, is provided. In the illustrated embodiment, the turbojet engine 20 is of the radial flow type and includes a rotary compressor 22 of conventional construction coupled to a turbine wheel 24 by means of a shaft 26 journaled by bearings 28. The turbojet engine includes an annular passage 30 including diffuser vanes 32 and anti-swirl vanes 34 and which extends to an annular combustor 36. The annular combustor includes a nozzle 38 which  
15 directs gases of combustion against blades 40 on the turbine wheel 24 to rotate the same. The gases of combustion are expelled by the nozzle 14 while rotation of the compressor wheel 22 by reason of the coupling between the turbine 24 and the compressor wheel 22 by the shaft 26 serves to provide compressed combustion air to the combustor 36.

Ram air scoops 44 may extend to just outside of the vehicle body 10 to capture  
20 ambient air and direct it to the compressor wheel 22 as is well known.

A source of lubricating oil, generally designated 46, is illustrated in the drawing as being located between the compressor wheel 22 and the turbine 24. However, there are a multitude of other locations which may be employed as well. It is highly desirable that the source of lubricating oil 46 be located in close proximity to the engine 20 so that heat rejected by the engine 20 to the interior of the vehicle body 10 will warm lubricating oil contained in the source 46 to reduce its viscosity.

Elsewhere within the body 10 is a source of fuel 48 for the engine 20 as well as a source of compressed gas under pressure, generally designated 50, which may be compressed air stored in a small pressure vessel.

Finally, the missile 10 includes a control system, generally designated 52.

Turning now to Figure 2, the area of the engine 20 containing the bearings 28 is a bearing cavity 56 of conventional construction. Lubricating oil is introduced into the cavity 56 via a conduit 58.

One form of the lubricating oil source 50 is shown in Fig. 2 and is seen to include an arcuate tank 60 shaped to fit within the body 10 and containing an interior, flexible bladder 62. A body of lubricating oil 64 is contained within the bladder 62. An inlet to the tank 60 is shown schematically at 66 and is connected to the pressurized gas source 50 in a manner to be seen. In any event, upon the admission of pressurized gas to the interior of the tank 60 via the inlet 66, pressure is exerted against the bladder 62 to expel the lubricant 64 via an outlet 66 connected to the conduit 58.

Within the conduit 58, between the source 50 of lubricating oil and the bearing cavity 56 is a solenoid operated valve 70. The solenoid operated valve 70 is of the type that is either fully open or fully closed. That is to say, the valve 70 does not have an analog modulating function. It is operated by the control 16 to alternately open and close at a variable rate while the source 50 is being pressurized so that an intermittent flow of lubricant 64 to the bearing cavity 56 results. Preferably, a metering orifice 74 is located in the conduit 56 downstream of the valve 70 to limit the maximum flow rate.

It has been determined that the engine 20 may operate without damage to the bearings 28 even when the flow of lubricating oil to the bearing cavity 56 is interrupted for as long as three seconds. Consequently, the total oil flow to the bearings 28 may be regulated by appropriately energizing and de-energizing the solenoid 70 to open and close the valve 76 associated therewith to provide what might be termed a "digital modulation" of oil flow.

An alternative form of the source of lubricating oil 50 is illustrated in Fig. 3. In this embodiment, a flexible bladder 80 is disposed within an arcuate tank 82. In this case, however, the bladder 80 is connected to a pressurized gas inlet 84 which is ultimately connected to the source 50 and an outlet 86 connected to be in fluid communication with the interior of the tank 82, but not the bladder, is provided for connection via the conduit 58 to the bearing cavity 56. In this embodiment, the admission of pressurized gas through the inlet 84 to the interior of the bladder 80 results in a body of oil 88 being subjected to pressure so it will flow through the outlet 86 to the bearing cavity 56.

5      Either form of the source of lubricating oil 46 shown in Figs. 2 and 3 may be employed. It is noted that bladder and tank type sources are highly desirable in that they allow complete depletion of the lubricating oil 64,88 from the source 46 as a result of pressure applied to the exterior of the bladder 62 or to the interior of the bladder 80, as the case may be.

66020-259960  
15      Fig. 4 illustrates a means of providing gas under pressure to the lubricant source 40, as well as to the source of fuel 48 which may be a similar bladder and tank construction. The gas source 50 may include a pressure bottle 90 connected by a selectively operable valve (not shown) to a pressure regulator 92 and then via a check valve 94 to a junction 96. The compressor section of the engine 20 may be tapped via a line 98 to obtain bleed air which is then passed through a check valve 100 to the junction 98. The junction 98 is then connected to the fuel source 48 and the oil source 46 via a pressure regulator 102. This system allows a stored gas to be utilized for initial pressurization of both the lubricating oil source 46 and the fuel source 48 with bleed air from the engine 20 taking over the pressurization function after the engine 20 has been started and brought up to operating speed. As the bottle 90 does not need to provide pressurized gas for the entire mission, its size may be reduced. In both cases, back flow is prevented by the check valves 94 and 100 and a gas at a desired pressure, designated "P<sub>a</sub>" in the drawings is provided to the oil and fuel sources 46 and 48 respectively.

20      As will be apparent, the embodiment illustrated in Fig. 4 provides gas under pressure based solely on the regulated pressure of gas from either the bottle 90 or the

engine 20. In some instances, finer control of pressurization may be desired. This is due to the fact that the pressure within the bearing cavity 56 will vary dependent upon altitude and forward velocity, the latter affecting ram air pressure at the inlet to the engine 10 and thus the bearing cavity 56 as well. In such a case, it may be desirable to regulate the pressure applied to the oil source 46 as a function of the pressure from the source in the form of the air bottle 90 or the engine 20 less the opposing pressure, namely, the pressure at the bearings 56. This latter pressure is designated " $P_b$ " in Fig. 5 and so the control parameter would then be based on  $(P_a - P_b)$ . This may be accomplished by interconnecting the bearing cavity 56 and a pressure regulator 110 which in turn interconnects the gas sources 20 or 90 and the oil source 46 as illustrated in Fig. 5.

A simplified control schematic is illustrated in Fig. 6. The control signal to the solenoid valve 70 is indicated by an arrow 116. Arrows 118 and 120 indicate inputs in the form of an indication of altitude and in an indication of forward speed. However, as noted previously, these could be combined into a single input representative of the pressure  $P_b$  in the bearing cavity 56. A third input 122 to the control 16 is based on ambient temperature or the temperature of the oil as this is a measure of viscosity. The lower the ambient air or oil temperature, the higher the viscosity, thereby necessitating a longer opening period of the valve 76 by the solenoid 70 to assure adequate flow.

In some instances, a feedback loop 124 may be included. This feedback loop 124 feeds back the pulse rate to compensate for the possible heating effect of the solenoid coil 70 on fuel flowing in the conduit 58. Because of the low oil flow rates typically encountered

in apparatus of this sort, rapid pulsing of the solenoid 70 could substantially heat solenoid, which heat would be transferred to the oil to reduce its viscosity and increase its flow rate. The fed back pulse rate provides a measure of possibly heating as a result of rapid pulsing.

From the foregoing, it will be appreciated that a lubrication system for bearings made according to the invention is simple, and consequently, highly reliable in terms of having a minimum number of components subject to failure. Moreover, through the expedient of intermittent flow of the lubricant, pumps need not be employed and yet the flow rate can be reliably controlled within a range where flow is sufficiently low that a large oil source 46 is not required. At the same time, so long as oil flow occurs at least every three seconds, adequate flow of lubricating oil to the bearings 28 is provided.

The use of tank and bladder oil source constructions minimizes the size of the source because they can be completely emptied and provides a means for a long term storage of lubricating oil.

CLAIMS

1. A lubrication system for an expendable gas turbine engine comprising:
- a gas turbine engine having a rotatable shaft;
- bearings journalling said shaft for rotation about an axis;
- a tank;
- a bladder within said tank;
- a source of gas under pressure;
- one of said tank and said bladder containing lubricating oil for said bearings;
- the other of said tank and said bladder being connectable to said source of gas under pressure;
- a conduit extending from said one of said tank and said bladder containing lubricating oil to said bearings;
- a solenoid operated valve in said conduit and operable only to either fully open or fully close; and
- a control circuit for pulsing said solenoid at a controlled rate to alternatingly (a) allow oil flow and (b) halt oil flow to said bearings for a time insufficient to cause oil starvation of said bearings.
2. The lubrication system of claim 1 wherein said one of said tank and said bladder is said tank.



2

2

2

...and the ...

2

2

2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2739 2740 2741 2742 2743 2744 2745 2746 2747 2748 2749 2750 2751 2752 2753 2754 2755 2756 2757 2758 2759 2760 2761 2762 2763 2764 2765 2766 2767 2768 2769 2770 2771 2772 2773 2774 2775 2776 2777 2778 2779 2780 2781 2782 2783 2784 2785 2786 2787 2788 2789 2790 2791 2792 2793 2794 2795 2796 2797 2798 2799 2800 2801 2802 2803 2804 2805 2806 2807 2808 2809 2810 2811 2812 2813 2814 2815 2816 2817 2818

9. The lubrication system of claim 1 wherein said vehicle is an airborne  
2 vehicle and said control circuit receives an input representative of the altitude of the  
vehicle.

10. The lubrication system of claim 1 wherein said tank is in sufficiently close  
2 proximity to said engine so as to receive heat rejected thereby so that lubricating oil is  
warmed by engine operation to reduce its viscosity.

11. A lubrication system for an expendable gas turbine engine in an airborne  
vehicle engine comprising:

a turbojet engine having a rotatable shaft;

bearings journalling said shaft for rotation about an axis;

a tank;

a bladder within said tank;

a source of gas under pressure;

8 one of said tank and said bladder containing lubricating oil for said  
bearings;

10 the other of said tank and said bladder being connectable to said source of  
gas under pressure;

12 a pressure regulator interconnecting said source of gas under pressure  
and said other of said tank and said bladder;

14 a conduit extending from said one of said tank and said bladder containing  
lubricating oil to said bearings;

16 a solenoid operated valve in said conduit and operable only to either fully  
open or fully close;

18 a metering orifice in said conduit between said solenoid operated valve  
and said bearings;

20 a control circuit for pulsing said solenoid at a controlled rate to alternately  
22 (a) allow oil flow and (b) halt oil flow to said bearings for a time insufficient to prevent oil  
starvation of said bearings; and

24 said control circuit receiving inputs representing vehicle velocity, vehicle  
altitude and lubricating oil or ambient temperature.

12. The lubricating system of claim 11 wherein said pressure regulator is  
connected to receive a control input representing pressure at said bearings.






13. A lubrication system for an expendable gas turbine engine comprising:  
2 a gas turbine engine having a rotatable shaft;  
bearings journalling said shaft for rotation about an axis;  
4 a vessel containing lubricating oil;  
a conduit extending from said vessel to said bearings;  
6 a solenoid operated valve in said conduit and operable only to either fully  
open or fully close; and

[illegible]

ABSTRACT

A lubrication system for an expendable gas turbine engine (20) having a rotatable shaft (26) is provided. Bearings (28) journal the shaft (26) for rotation about an axis. The system includes a vessel (46) for containing lubricating oil, a conduit (58) extending from the vessel (46) to the bearings (28), and a solenoid operated valve (70,76) in the conduit (58) and operable to only either fully open or fully closed. A control circuit (16) is provided for pulsing the solenoid (70) at a controlled rate to alternately (a) allow oil flow and (b) halt oil flow to the bearings (28) for a time insufficient to cause oil starvation of the bearings (28).

5  
666020-330560

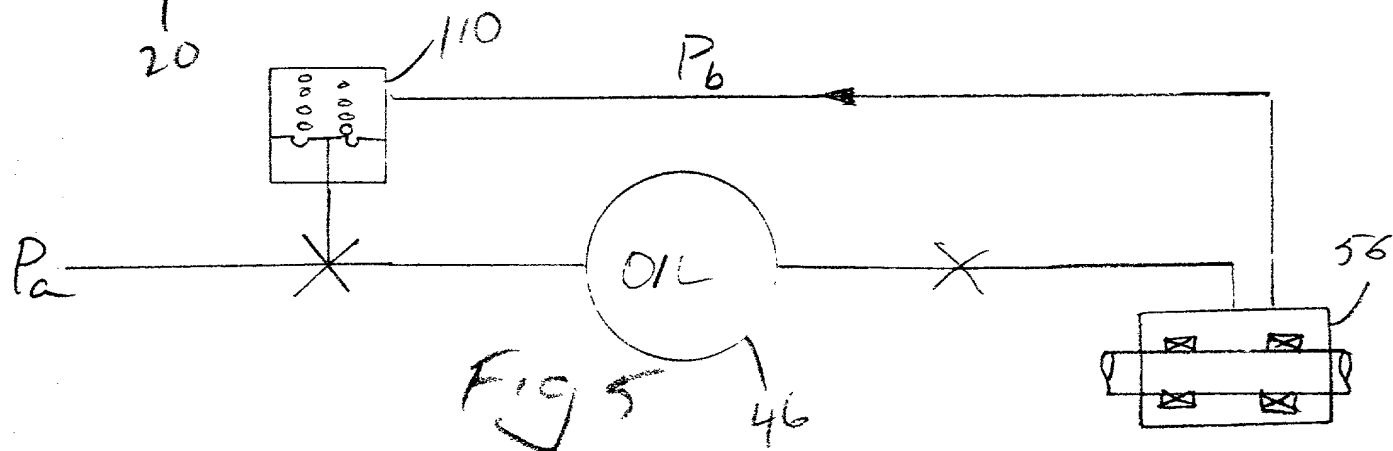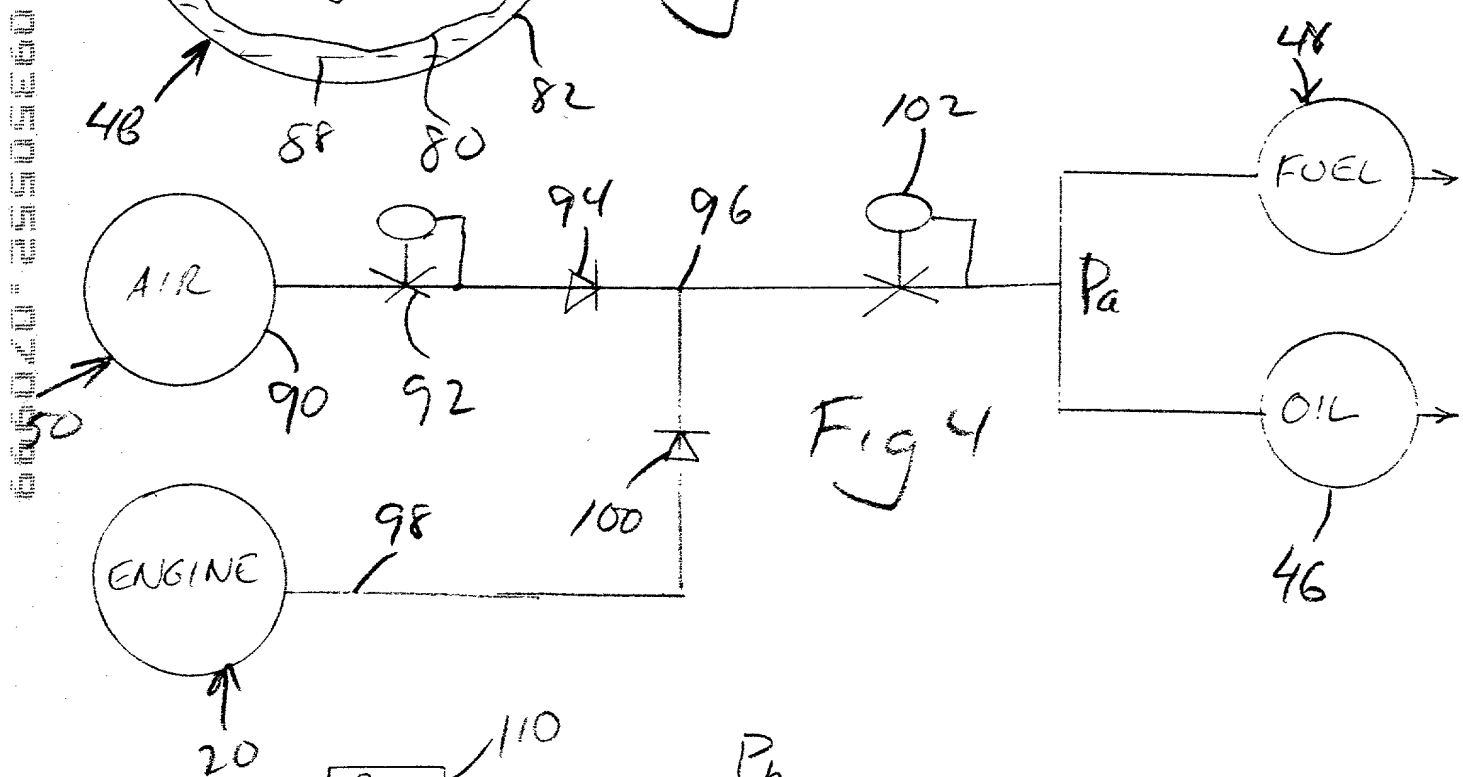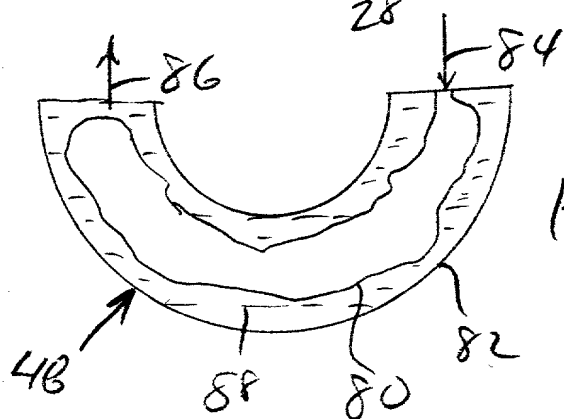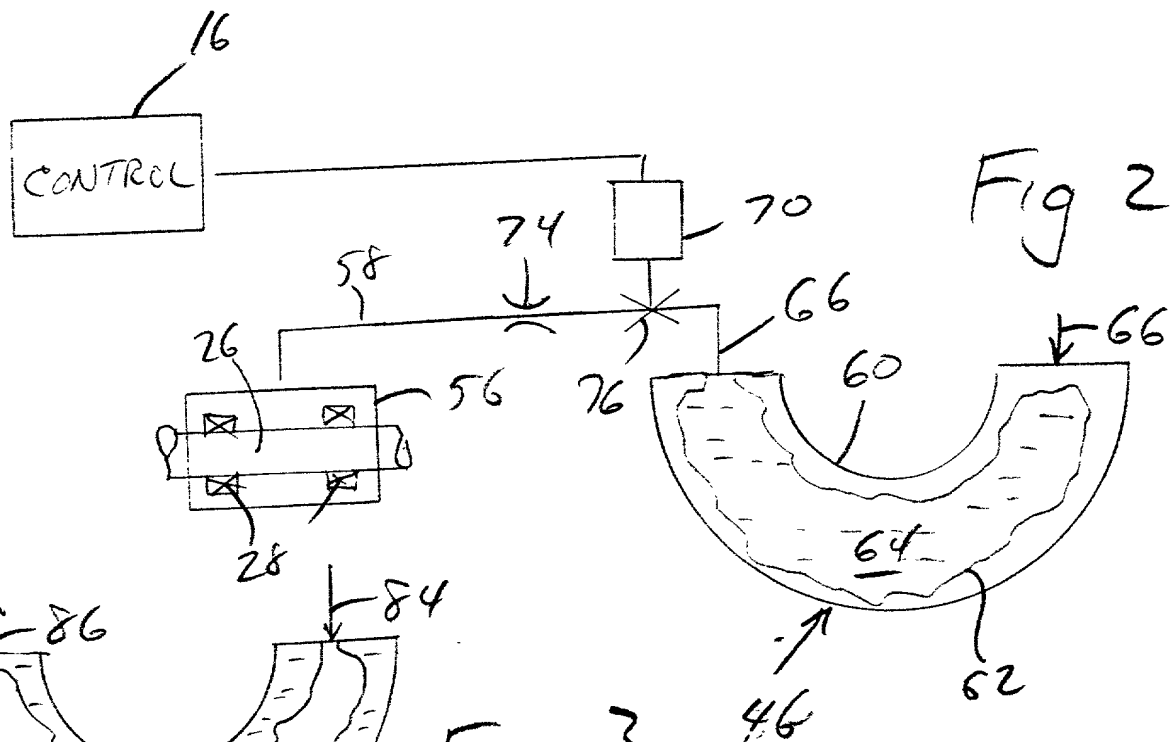

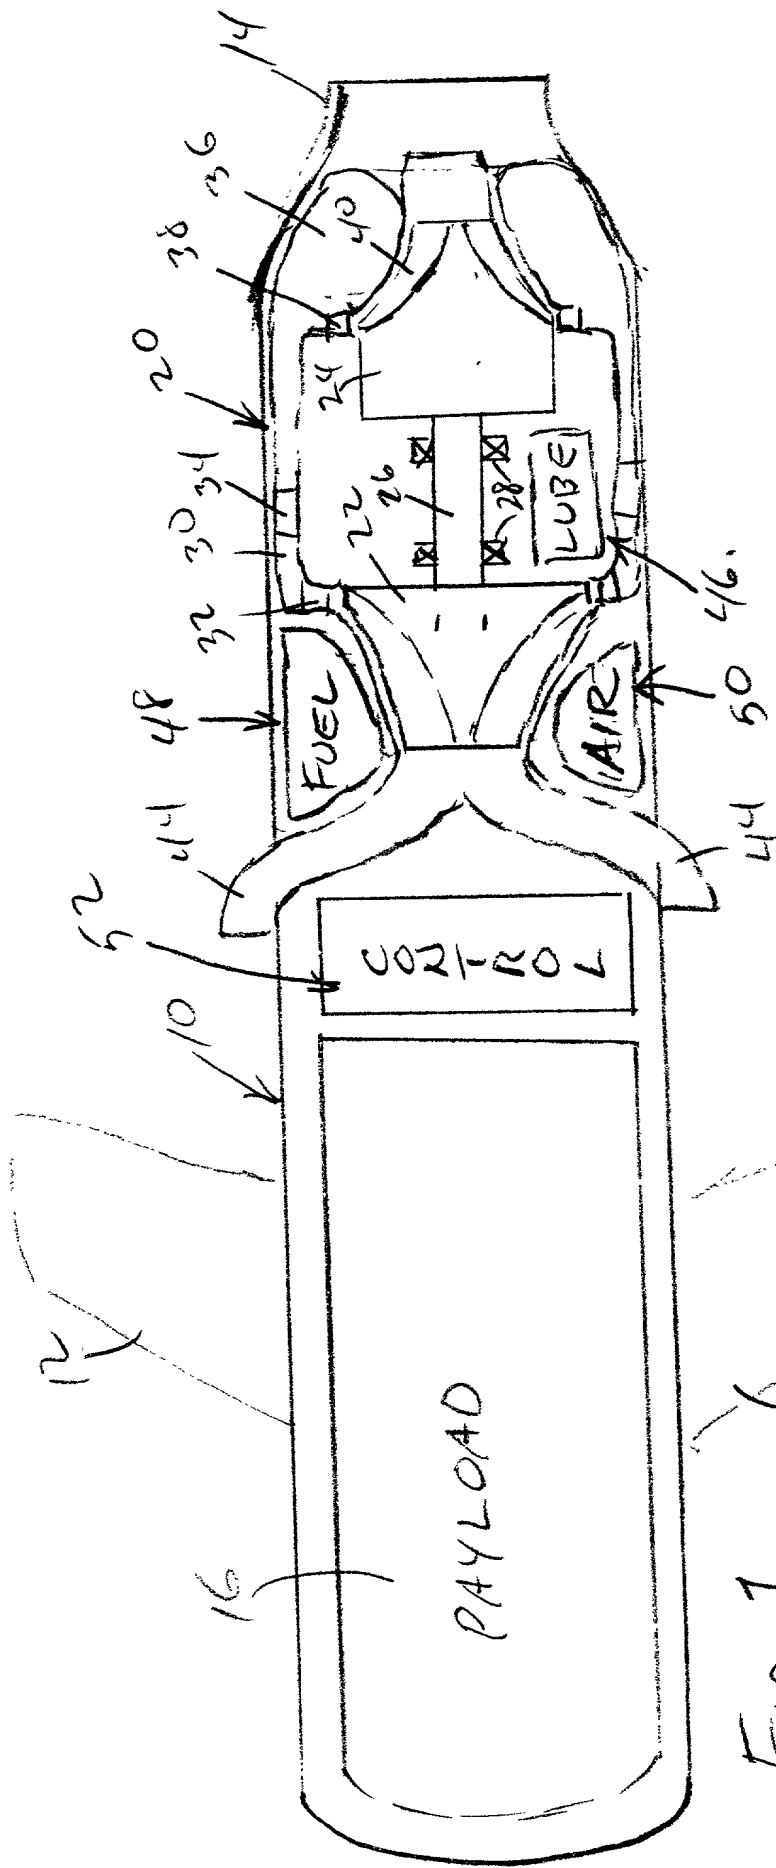


Fig 1

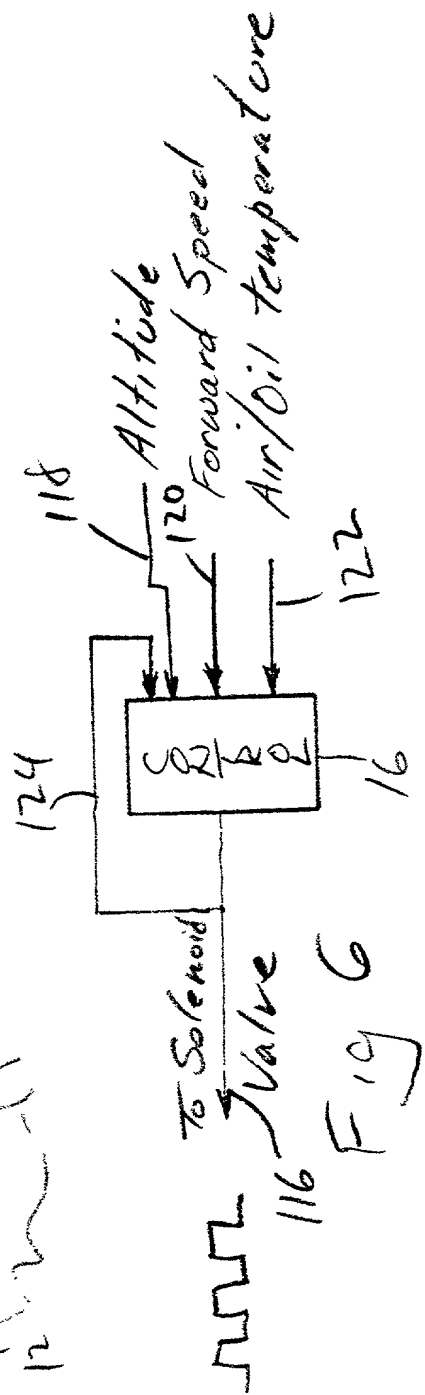


Fig 6

# DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: TURBOJET ENGINE LUBRICATION SYSTEM,  
the specification of which:

☒ is attached hereto. ☐ was filed on \_\_\_\_\_  
as Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to above, and that I believe the named inventor(s) to be the original and first inventor(s) of the subject matter which is claimed and for which a patent is sought, and hereby acknowledge the duty to disclose information which is material to the examination of the application in accordance with § 1.56 (reprinted on the back) of Title 37 of the Code of Federal Regulations.

I also hereby state that no patent applications on this invention have previously been filed in countries foreign to the United States of America, except as follows:

COUNTRY	APPLICATION NUMBER	DATE FILED (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119	
			yes	no
			yes	no
			yes	no
			yes	no

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) _____	(Filing Date) _____	(Status: patented, pending, abandoned) _____
(Application Serial No.) _____	(Filing Date) _____	(Status: patented, pending, abandoned) _____

I hereby appoint Richard S. Phillips (Reg. No. 17,314), Wm. A. VanSanten (Reg. No. 22,810), Jeffrey L. Clark (Reg. No. 29,141), John S. Mortimer (Reg. No. 30,407), F. William McLaughlin (Reg. No. 32,273), Dean A. Monco (Reg. No. 30,091), and Jeffery N. Fairchild (Reg. No. 37,825) each registered to practice before the United States Patent and Trademark Office and practicing as the firm of **WOOD, PHILLIPS, VAN SANTEN, CLARK & MORTIMER, 500 WEST MADISON STREET, SUITE 3800, CHICAGO, ILLINOIS 60661 (Telephone 312-876-1800)**, and James A. Wanner (Reg. No. 24,452), and Kristin L. Chapman (Reg. No. 38,102), employees of **HAMILTON SUNDSTRAND CORPORATION, 4747 Harrison Avenue, Rockford, Illinois 61125-7002 (Telephone 815-226-6000)**, my attorneys with full power of substitution and revocation, to prosecute this application, to make alterations or amendments therein, to receive the patent and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the firm. All telephone inquiries may be directed to **WOOD, PHILLIPS, VAN SANTEN, CLARK & MORTIMER**:

William A. VanSanten

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under



Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of sole or first Joint Inventor Malcolm J. McArthur Citizenship U.S.A.  
Inventor's Signature Malcolm J. McArthur Date June 30, 1999  
Residence 2340 Mardavido Lane, Fallbrook, CA 92028  
Post Office Address \_\_\_\_\_

Full name of second Joint Inventor, if any Anthony C. Jones Citizenship U.S.A.  
Inventor's Signature Anthony C. Jones Date June 30, 1999  
Residence 10867 Resos Place, San Diego, CA 92124  
Post Office Address \_\_\_\_\_

Full name of third Joint Inventor, if any \_\_\_\_\_ Citizenship \_\_\_\_\_  
Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full name of fourth Joint Inventor, if any \_\_\_\_\_ Citizenship \_\_\_\_\_  
Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full name of fifth Joint Inventor, if any \_\_\_\_\_ Citizenship \_\_\_\_\_  
Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_  
Post Office Address \_\_\_\_\_